


CHASING Reel

User Manual

V1.0


The manual winder (Reel) uses a total of 14 special customized stainless steel bearings, adopts high-precision aluminum alloy timing belt transmission and a high-quality stainless steel reciprocating screw cable anti-winding technology. IP65 waterproof and dustproof grade, up to 200 meters of cable can be carried. The overall structure is simple and the performance is reliable, giving you more fun in operation.

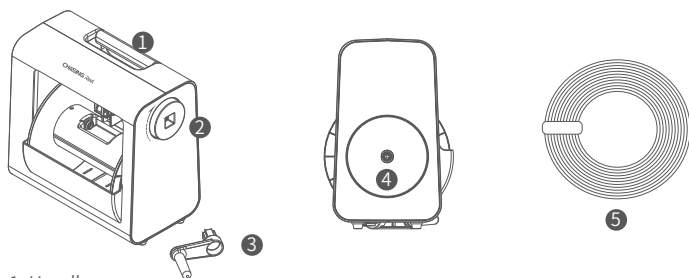

1. Handle
2. Manual handle interface
3. Detachable handle
4. 3m cable connection socket
5. 3m cable: connect the handle and manual winder


Installation and connection

1. Connect the 3m cable to the manual winder and handle respectively, and tighten the nuts.
2. Connect the buoyancy line on the manual winder to the submersible, and tighten the nut.
3. Reserve a suitable length, hang the buckle at the head of the cable on the buckle bracket at the tail of the submersible and tighten it.

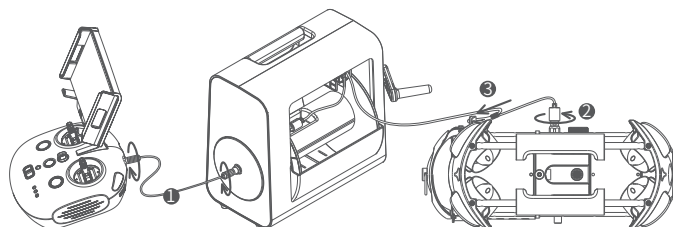


Pay-off and take-up


1) Installation




Press the button on the right side of the straightener to open the straightener cover.



Insert the buoyancy wire plug into the groove interface of the winder and tighten the nut.




Put the buoyancy line into the straightener and close the lid.




Install the manual handle.


2) Pay off



Press the button on the right side of the straightener to open the straightener cover.




Remove the buoyancy line from the straightener.




Close the cover of the straightener, Fix the winder and start manual pay-off.


3) Take-up



Press the button on the right side of the straightener to open the straightener cover.



Put the buoyancy line into the straightener and close the lid of the straightener.



Install the manual handle and start to take up the wire manually.

Specifications

Size	296x189x279 mm
Weight	2.5kg
Maximum storage cable length	200m

Precautions

1. If you encounter a blasting line, you should stop retracting and unwinding the line immediately and rearrange the buoyancy line before continuing.
2. Before use, check whether the O-ring seal on the buoyancy line plug is dropped or damaged. If it is missing or damaged, please replace it in time.
3. During the winding process, please pay attention to fixing the manual winder to prevent it falling and hurting people or damaging the machine.
4. The manual winder supports an IP65 waterproof level. Please do not put the manual winder directly into the water or splash liquid on it. If it is damaged by water, it will not be covered by the warranty.

CHASING

www.chasing.com

support@chasing-innovation.com

This content is subject to change without prior notice,

you could have the latest user manual by the
www.chasing.com.